


BAUDOUIN SERIES POWERKIT DIESEL ENGINE

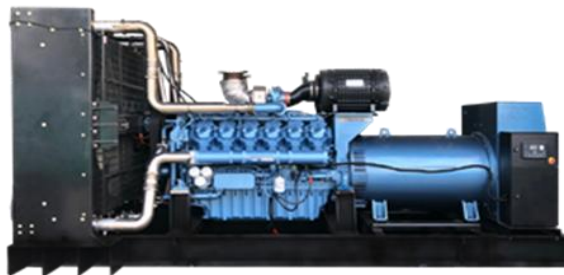

Technical Data

60HZ , 1800RPM , PF:0.8

MODEL	ENGINE TYPE	EMISSIONS	60HZ 380 VOLTS				STANDARD DIMENSIONS			
			PRIME		STANDBY		L	W	H	WEIGHT
			KVA	KW	KVA	KW	MM	MM	MM	KG
PE40BA	4M06G1D3/6	EU III	45	36	50	40	1700	600	1300	1000
PE50BA	4M06G2D3/6	EU III	56	45	63	50	1700	550	1100	800
PE60BA	4M10G2D3/6	EU III	68	54	75	60	1950	730	1230	1250
PE80BA	4M10G83/6		94	75	100	80	1950	730	1300	1300
PE80BA	4M10G4D3/6	EU III	94	75	100	80	1950	730	1300	1300
PE100BA	4M10G100/6		113	90	125	100	1950	820	1400	1350
PE100BA	4M11G4D3/6	EU III	113	90	125	100	2100	820	1300	1350
PE110BA	6M11G110/6		125	100	138	110	2350	850	1300	1450
PE125BA	6M11G135/6		138	110	156	125	2500	875	1400	1500
PE125BA	6M11G4D3/6	EU III	138	110	156	125	2500	875	1400	1500
PE150BA	6M11G160/6		163	130	188	150	2500	875	1400	1600
PE150BA	6M11G6D3/6	EU III	169	135	188	150	2500	875	1400	1600
PE175BA	6M11G176/6		200	160	219	175	2500	875	1400	2000
PE200BA	6M16G200/6		225	180	250	200	2900	1050	1450	2300
PE200BA	6M12G4D3/6	EU III	225	180	250	200	2650	1000	1400	2200
PE250BA	6M16G250/6		281	225	313	250	2900	1050	1450	2400
PE250BA	6M16G8D3/6	EU III	281	225	313	250	3000	1100	1520	2400
PE300BA	6M16G308/6		338	270	375	300	2950	1100	1555	2500
PE300BA	6M16G8D3/6	EU III	338	270	375	300	3000	1100	1520	2500
PE350BA	6M21G390/6		438	350	438	350	3100	1150	1570	2850
PE350BA	6M21G4D3/6	EU III	438	350	438	350	3000	1150	1600	2850
PE400BA	6M21G400/6		450	360	500	400	3150	1150	1570	2950
PE400BA	6M21G4D3/6	EU III	450	360	500	400	3000	1150	1600	2950
PE450BA	6M21G460/6		500	400	563	450	3200	1200	1710	3200
PE450BA	6M21G6D3/6	EU III	500	400	563	450	3200	1200	1710	3200
PE500BA	8M21G520/6		563	450	625	500	3200	1360	1750	3600
PE500BA	8M21G3D3/6	EU III	563	450	625	500	3200	1360	1725	3600
PE550BA	8M21G550/6		625	500	688	550	3900	1700	2100	3800
PE550BA	8M21G4D3/6	EU III	625	500	688	550	3200	1400	1750	3800
PE600BA	6M33G600/6		681	545	750	600	3900	1700	2100	3900
PE600BA	6M33G8D2/6	TIER 2	681	545	750	600	3900	1700	2100	3900
PE650BA	6M33G660/6		750	600	813	650	3900	1700	2100	4200
PE700BA	12M33G2D2/6	TIER 2	813	650	875	700	4400	1800	2300	6500
PE750BA	12M33G4D2/6	TIER 2	844	675	938	750	4400	1800	2300	6700
PE800BA	12M26G800/6		900	720	1000	800	4400	1800	2300	6700
PE900BA	12M26G900/6		1000	800	1125	900	4500	1770	2350	7500
PE900BA	12M33G6D2/6	TIER 2	1000	800	1125	900	4400	1800	2300	7450
PE1000BA	12M26G1000/6		1125	900	1250	1000	4500	1770	2350	8000
PE1000BA	12M33G8D2/6	TIER 2	1125	900	1250	1000	4500	1800	2300	8000
PE1250BA	12M33G1300/6		1413	1130	1563	1250	4800	2200	2550	10000
PE1250BA	12M33G12D2/6	TIER 2	1419	1135	1563	1250	4800	2200	2550	10000
PE1500BA	16M33G1500/6		1706	1365	1875	1500	5300	2200	2800	13500
PE1500BA	16M33G2D2/6	TIER 2	1706	1365	1875	1500	5700	2350	2685	13500

發電機組特性:

- (1) 試驗方法參考CNS2901 及 CNS1024 之規定。
- (2) 電壓變動率 $\pm 2.5\%$ 以內 (試驗負載 PF=0.8)。
- (3) 瞬間電壓變動率 $\pm 25\%$ 以內 (試驗負載 PF=0.4)。
- (4) 頻率變動率空載至滿載 $\pm 5\%$ 以內 (試驗負載 PF=0.8)。
- (5) 結構穩定, 可耐額定轉速之120%超速。
- (6) 供電穩定, 波形偏差於 10%以內。
- (7) 絕緣等級H級。
- (8) 本產品通過消防署認證。

宏達國際機電有限公司
台北市南京東路4段197號11樓之2
TEL:02-87120878 FAX:02-87120687
由 專員為您服務